




SEAL® 62 Ultra Plus Series

Laminator

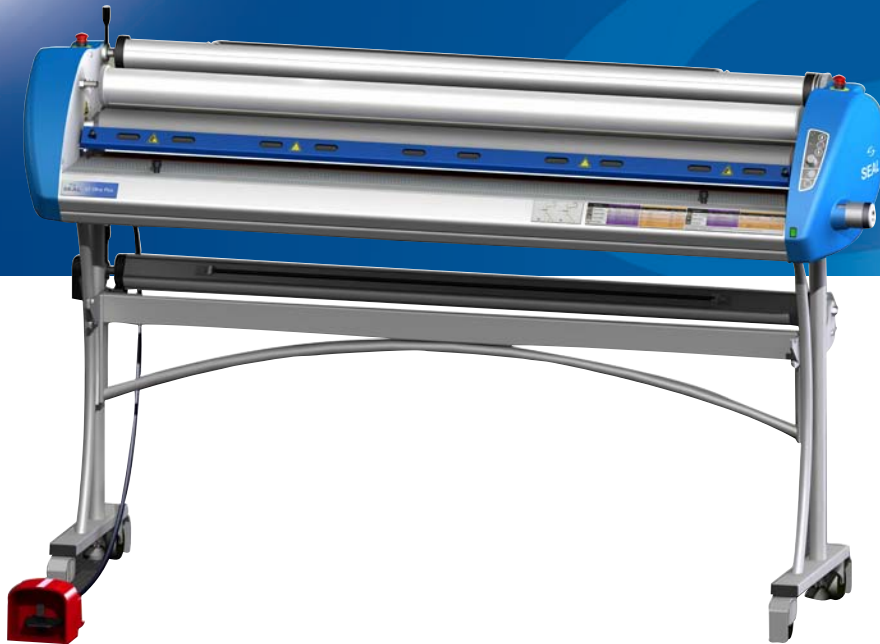

The SEAL 62 Ultra Plus Series provides the following features:

Optimum performance

- Maximum nip opening of 1/2" for processing of most popular substrates
- Foot control for hands-free operation and precise media/substrate feed
- 61" (1550 mm) working width covers majority of the inkjet market

Ease of use

- Automated take-up for removing release liners
- Simple touch pad control panel
- Quick reference guide on board for applications
- Adjustable speed dial for user control of settings
- One control knob for 8 nip settings from 0 to 1/2"
- Easy to clean silicon rollers prevent sticking of materials
- Auto-grip shafts for easy loading of materials and removal of release liners
- Robust castors for easy mobility of machine

Safety

- Safety system with emergency stops
- CE/ETL/CSA certified
- Anti-tip bars for increased stability

The SEAL® 62 Ultra Plus Series is the ultimate range of easy to use roller laminators. Low-priced yet fully functional, the 62 Ultra Plus, 62 Ultra S Plus or 62 Ultra C Plus are an ideal match for your wide-format printer when high quality, professional graphics are required.

Capable of mounting, laminating and encapsulating prints up to 61" (1550 mm), the SEAL Ultra Plus Series provides a cost-effective finishing solution for both inkjet and photographic media. With easy to use controls, simplified material loading, and our newest feature of an automated take-up for removing release liners, these feature packed laminators will process the most popular substrates up to 61" wide.

The 62 Ultra Plus Series focus on simplicity and affordability and are great for

businesses wanting to expand the applications offered to their customers or those wishing to complement existing lamination facilities. With its new sleek, attractive design, a SEAL 62 Ultra Plus rolls anywhere it is needed, or stores neatly out of the way.

The 62 Ultra Plus Series provides a single-heated, dual-heated and cold model, all ideal for producing a wide variety of quality applications.

The SEAL 62 Ultra Plus Series are ideal for producing a wide variety of applications:

Rigid Indoor Displays



Flexible Indoor Displays



Floor Graphics



Backlit Displays



Pop-Up Displays



Rigid Outdoor Displays



SEAL® 62 Ultra Plus Series

Technical Specifications

	62 Ultra Plus	62 Ultra S Plus	62 Ultra C Plus
Maximum Working Width	61" (1550 mm)	61" (1550 mm)	61" (1550 mm)
Maximum Diameter Supply Roll	6" (156 mm)	6" (156 mm)	6" (156 mm)
Maximum Speed	5ft/min.	5ft/min .	10ft/min.
Maximum Substrate Thickness	1/2" (10 mm)	1/2" (10 mm)	1/2" (10 mm)
Maximum Roller Temperature	120°C (250°F)	120°C (250°F)	N/A
Roller Heating	Dual	Single (top)	None
Pull Rollers	Yes	No	No
Width	76.3" (1940 mm)	76.3" (1940 mm)	76.3" (1940 mm)
Height	45.5" (1156 mm)	45.5" (1156 mm)	45.5" (1156 mm)
Depth	22" (570 mm)	22" (570 mm)	22" (570 mm)
Net Weight	307 lbs (140 kg)	307 lbs (140 kg)	307 lbs (140 kg)
Shipping Dimensions			
Width	84" (2134 mm)	84" (2134 mm)	84" (2134 mm)
Height	30.5" (775 mm)	30.5" (775 mm)	30.5" (775 mm)
Depth	28.5" (724 mm)	28.5" (724 mm)	28.5" (724 mm)
Shipping Weight	436 lbs (198 kg)	436 lbs (198 kg)	436 lbs (198 kg)
Electrical Requirements			
Single Phase	Single Phase	Single Phase	Single Phase
230 VAC	230 VAC	230 VAC	115 VAC
50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
13A NEMA 6-20	13A NEMA 6-20	13A NEMA 6-20	1A NEMA 5-15
Item Number	63064	63065	63066


Film application guide.



Simple to use, ergonomic control panel and nip adjustment.



Automated release liner take-up system.

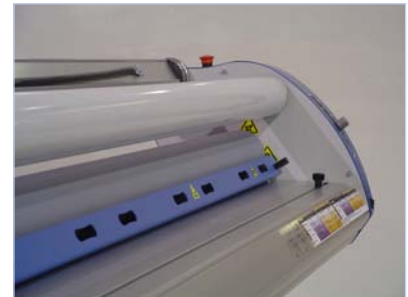

Neschen Americas
7091 Troy Hill Drive
Elkridge, MD 21075
U.S.A.
Tel: 410-540-8900
Fax: 410-579-8960

Neschen Americas Canada
1601 Matheson Blvd E., Unit 4
Mississauga, Ontario
Canada L4W 1H9
Tel: 905-212-9232
Fax: 905-212-9313

Contact your local distributor:

SEAL® Brand is a registered trademark of Neschen Americas



www.sealbrands.com